

1 General Description

The original 250W Power Management Unit provided up to 250 Watts of on-board electrical power generation for small to medium-sized UAVs. This updated version provides up to 500W and supports input voltages exceeding 130V. The physical form factor is unchanged. A variant manufactured for Currawong Engineering is available with an optional engine starter.

The 250W PMU simplifies UAV power distribution by providing multiple power outputs, which are individually programmable for voltage as well as being battery-backed. Dual (redundant) battery support is also included as standard.



Figure 1 – 250W PMU

The PMU connects to a suitable brushless DC electric motor, which is in turn driven by the aircraft's primary power plant, usually an internal combustion engine.

2 Features

- Buck-boost converter allows electrical power generation over 7:1 RPM range.
- Multiple independent, individually user-programmable power outputs:
 - Avionics: 12 – 21 VDC
 - Payload: 12 – 21 VDC
 - Servo: 5 – 12 VDC
- Outputs are battery-backed and switchable (on/off) via hardware signal or remotely via command.
- Dual (redundant) battery support. The PMU includes two independent and identical battery chargers. Supported battery types include:
 - LiPo: 5S, 6S
 - LiS: 8S, 9S, 10S
 - LiFe: 6S, 7S
- Industry-standard 28 VDC output (available during power generation and when the PMU is connected to umbilical power).
- RS232 and CAN control and monitoring interfaces provide extensive monitoring and reporting of voltages, currents, battery charge status and temperatures.
- Optional engine starter may be activated locally via a momentary push-button switch, or remotely via command to facilitate in-flight engine restarting (Currawong Engineering variant).
- Weight: 315 grams (11.1 ounces).
- Dimensions: 124.4 x 85.0 x 32.5mm.

This page intentionally left blank.

3 Contents

1	General Description	1
2	Features	1
3	Contents	3
4	Operation	4
4.1	Internal architecture	4
4.2	Battery backup	5
4.3	Shutdown inputs	5
4.3.1	Avionics, Servo, Payload	5
4.3.2	Master	5
4.4	Temperature monitoring	5
4.4.1	Internal	5
4.4.2	External	5
5	Configuration	6
6	Connectors.....	7
6.1	X1 – BLDC motor	7
6.1.1	Engine starting	8
6.2	X2 – Batteries.....	9
6.2.1	Choosing batteries	9
6.2.2	Additional considerations when choosing battery voltage.....	9
6.2.3	Battery chargers	10
6.2.4	Low battery voltage cut-out.....	10
6.2.5	Minimum battery voltage requirement	10
6.3	X3 – Avionics.....	12
6.4	X4 – Servo / Payload	13
7	Front Panel Arrangement	14
7.1	Connector pin locations.....	14
7.2	Visual indicator locations.....	14
8	Specifications	15
8.1	Absolute Maximum Ratings <i>Note 1</i>	15
8.2	Recommended Operating Conditions.....	15
8.3	Electrical Specifications (-40 to +85°C, typical values given for +25°C)	16
8.3.1	Power outputs	16
8.3.2	Battery inputs.....	16
8.3.3	Communications interfaces.....	17
8.3.4	Digital and analog inputs.....	17
8.3.5	Monitoring.....	17
8.4	Typical Characteristics	18
8.4.1	28V Buck-Boost converter efficiency.....	18
8.4.2	28V Buck-Boost converter maximum output power	18
8.4.3	28V Buck-Boost converter temperature rise.....	19
8.4.4	28V Buck-Boost converter quiescent behaviour.....	19
8.5	Mechanical Characteristics.....	20
8.5.1	Mounting.....	21
9	Document version history	21
9.1	1.5 -> 2.0	21

4 Operation

The 250W PMU takes power from 4 possible sources and creates 4 regulated output rails as shown in Table 1 and Table 2 below:

Power inputs	
BLDC motor	3-phase AC input
Umbilical	DC input
Battery A	Bi-directional
Battery B	Bi-directional

Table 1 – Power inputs

Power outputs	
28VDC bus	Bi-directional
Avionics	DC output
Servo	DC output
Payload	DC output

Table 2 – Power outputs

Two of the four power sources are batteries. The PMU draws power from the batteries when other power sources are not present, or charges them when other power sources are present.

The 28VDC bus is usually used as an output, but it can also be used as an input to improve redundancy if multiple PMUs are present (such as in twin-engined aircraft). The 28VDC bus is only maintained at 28V when electrical power generation (from the BLDC motor) is occurring, or umbilical power is present. When operating from battery power, the 28VDC bus assumes the highest battery voltage available.

The avionics, servo and payload outputs are all user-configurable for voltage, and the payload output can be shed automatically when the PMU is operating from battery power alone.

4.1 Internal architecture

The internal architecture of the PMU is shown in Figure 2 below. Only the main power pathways are shown. Diodes shown are not physical diodes; they are “ideal diodes” implemented with FET switches.

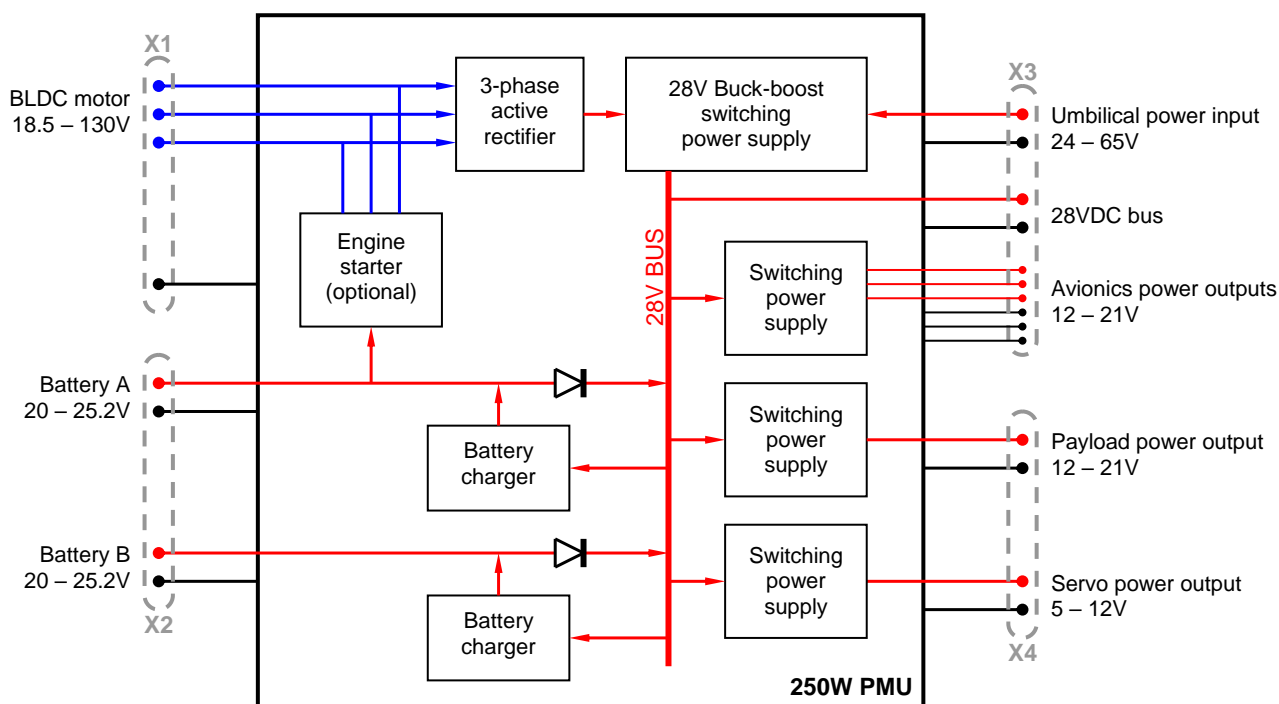


Figure 2 – PMU internal architecture

One of the main features of the PMU is that electrical power generation can occur over a very wide RPM range – up to 7:1 if the system is designed optimally. This is possible because the main 28V switching power supply (shown in the top right-hand corner of Figure 2 above) creates a regulated 28VDC bus regardless of whether the input voltage is less than or greater than 28V.

4.2 Battery backup

The Avionics, Servo and Payload outputs are all battery-backed. In other words, when electrical power generation and umbilical power are not present, outputs are maintained using battery power.

4.3 Shutdown inputs

4.3.1 Avionics, Servo, Payload

The Avionics, Servo and Payload outputs each have a dedicated shutdown input pin. When a shutdown pin is pulled low (via a switch or open collector output), the respective output is turned off. These shutdown inputs are implemented in hardware and override software control of output state.

4.3.2 Master

A master shutdown input is also provided which shuts everything down and allows the batteries to remain connected without discharging.

4.4 Temperature monitoring

4.4.1 Internal

The internal temperature of the PMU is sensed and reported, and if the internal temperature exceeds a pre-set limit the main Buck-Boost converter shuts down. Thermal shutdown means that electrical power generation and battery charging cease, but the avionics, servo and payload outputs are not affected as long as at least one battery is connected. During thermal shutdown, the 28VDC bus assumes the highest available battery voltage.

4.4.2 External

A number of external temperature sensors may be connected to the PMU, and the resulting values are all reported in the telemetry streams. Battery A, Battery B, and the BLDC motor itself may all be thermally monitored. A 10k NTC temperature sensor mounted in thermal contact with the respective device is all that is required. The other end of the temperature sensor should be connected to ground. Polarity is unimportant for NTC type temperature sensors.

Currently external temperature sensing does not trigger any actions – it is merely for operator information.

5 Configuration

A Windows application that provides easy access to most of the 250W PMU's features may be downloaded from https://millswoodeng.com.au/resources.html#250w_pmu. Connect the PMU to a PC using the PMU's RS232 interface using an RS232 to USB adapter. The configuration utility allows the PMU's settings to be customised (and written to the PMU).

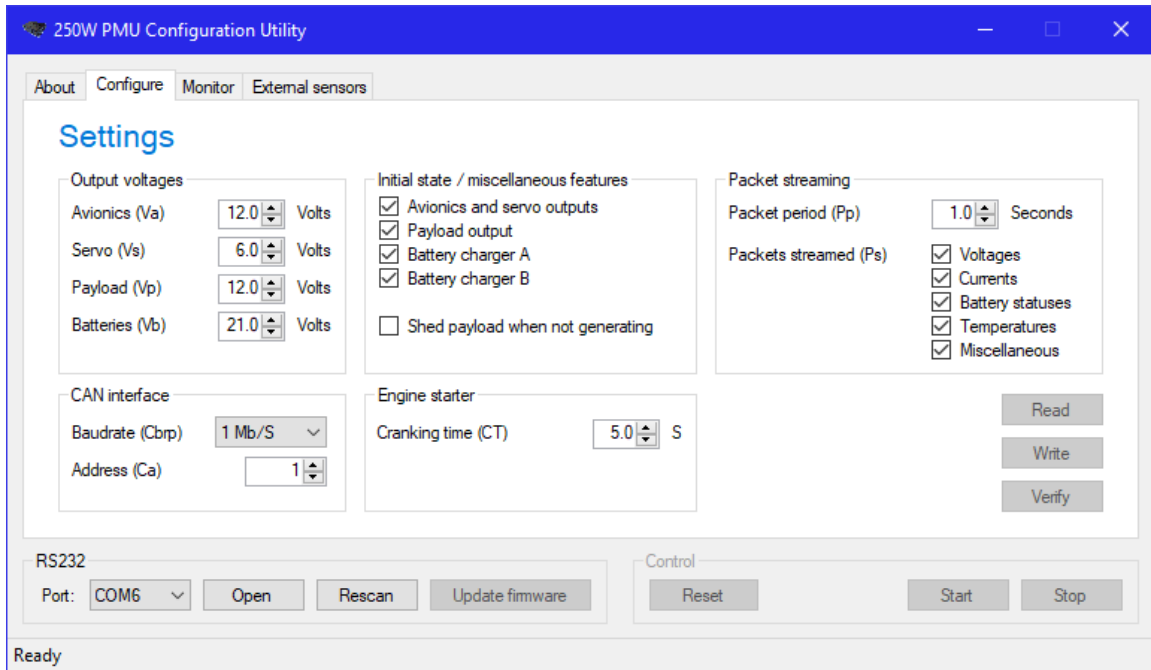


Figure 3 – 250W PMU configuration utility settings

The configuration utility also allows the PMU to be controlled and monitored in real-time.

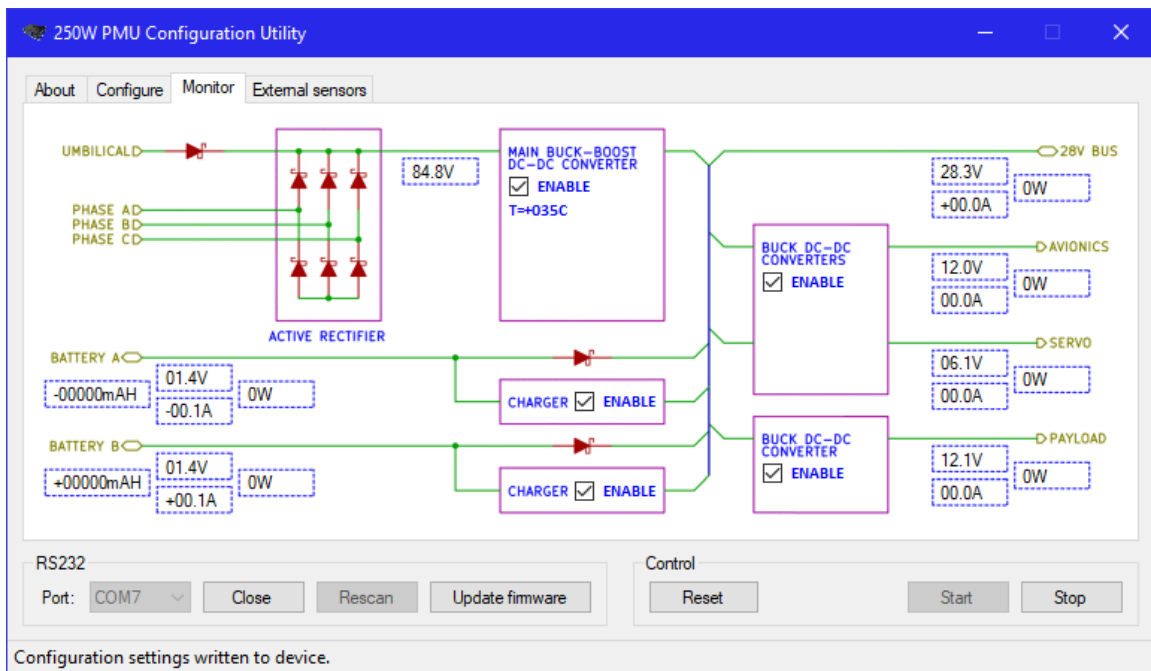


Figure 4 – 250W PMU configuration utility monitoring

6 Connectors

Four connectors required to interface with the PMU, two of each type listed in Table 3 below. The connectors specified are from the Harwin M80 Datamate MixTek series. Connectors are available ex-stock from the major online distributors.

Connector	Harwin part number	Online distributors
X1, X3	M80-4C11205F1-04-325-00-000	Mouser (PN: 855-M804C11205F14325) Digi-Key (PN: 952-1264-ND)
X2, X4	M80-4C10405F1-04-325-00-000	Mouser (PN: 855-M804C10405F14325) Digi-Key (PN: 952-1258-ND)

Table 3 – Connector part numbers

6.1 X1 – BLDC motor

Connect the 3 terminals of a suitable brushless DC motor to pins A, B and C of X1. Over the normal operating rpm range that electrical power generation is desired, the peak voltage should be in the range 18.5 to 130V. Peak voltages up to 140V are tolerated, but the main Buck-Boost will shut-down during periods of over-voltage to protect itself.

Pin D of X1 is a low-impedance ground that may be bonded to airframe ground if a chassis earth return system is implemented. Otherwise, connection of this pin is optional.

Connection of Hall sensors is optional, although the PMU requires Hall input 1 to be connected if monitoring of the BLDC motor's speed is required. Hall power and ground are provided for convenience.

Pin 4 is a master shutdown input. Be careful not to accidentally ground this pin.

Pin	Name	Type	Description
X1:A	BLDC phase A	I/O	Connect to one of the 3 BLDC motor terminals.
X1:B	BLDC phase B	I/O	Connect to one of the 3 BLDC motor terminals.
X1:C	BLDC phase C	I/O	Connect to one of the 3 BLDC motor terminals.
X1:D	Airframe ground	Ground	Optional connection.
X1:1	Hall 1	Input	Connect to open-collector output of Hall sensor 1.
X1:2	Hall 2	Input	Connect to open-collector output of Hall sensor 2.
X1:3	Hall 3	Input	Connect to open-collector output of Hall sensor 3.
X1:4	Master shutdown	Input	Shorting to ground turns the PMU off. Leave open-circuit if functionality not required.
X1:5	Hall power	Output	+5VDC power output for Hall sensors.
X1:6	Hall ground	Ground	Ground connection for Hall sensors.
X1:7	Arm	Input	Hardware interlock to arm/disarm engine starting. Shorting to pin X1:8 enables engine starting. For safety reasons this is a purely hardware interlock that cannot be overridden.
X1:8	Arm ground	Ground	Ground connection for arm input.
X1:9	BLDC motor temperature sensor	Input	Connect to a 10k NTC temperature sensor that is in intimate thermal contact with the BLDC motor. Motor temperature sensing is optional.
X1:10	Sensor ground	Ground	Ground reference for motor temperature sensor.
X1:11	Start	Input	Shorting to pin X1:12 starts the engine.
X1:12	Start ground	Ground	Ground connection for start input.

Table 4 – X1 pin descriptions

6.1.1 Engine starting

A fully-integrated (internal) engine starter is available for units sourced from Currawong Engineering and their distributors. This plug-in module is manufactured and fitted by Currawong Engineering and is designed to complement their range of UAV engines and accessories.

Use of the engine starter requires the use of a BLDC motor fitted with Hall sensors, and these must all be connected to the PMU. Starting can be initiated either by switching the start pin to ground or by sending the PMU a command. In either case, the Arm pin must be low prior to attempting to start the engine.

If engine starting is required, we strongly recommend contacting Currawong Engineering (www.currawongeng.com) or one of their distributors for an integrated solution. The engine, BLDC motor, PMU, ECU and fuel pump can be tightly mechanically and electrically integrated resulting in a more compact and reliable propulsion and power solution.



Figure 5 –Corvid 29 engine package from Currawong Engineering

Note that the Currawong Engineering variant of the 250W PMU is slightly different to the Millswood Engineering offering. The Currawong Engineering variant has a single (Avionics) LED on its front panel, and is a different colour. (The device shown in Figure 5 is gold; current production is silver). Other electrical and mechanical specifications are identical.

6.2 X2 – Batteries

The PMU supports the connection of up to two batteries, and these are managed completely independently. Internal low-loss battery switching is implemented such that disconnection or failure of either battery – even to a dead short – has no effect on operation of the PMU as long as an alternative source of power to the PMU is present (which may be battery, electrical power generation or umbilical power). It is possible – although perhaps not all that sensible – to operate the PMU with no batteries at all.

If engine starting is anticipated then Battery A must be fitted, as cranking current is drawn solely from Battery A. Battery B is highly recommended if in-flight engine re-starts are anticipated to prevent loss of electrical power if Battery A becomes depleted from repeated cranking.

Pin	Name	Type	Description
X2:A	Battery A +	I/O	Connect to positive terminal of Battery A.
X2:B	Battery A –	Ground	Connect to negative terminal of Battery A.
X2:C	Battery B +	I/O	Connect to positive terminal of Battery B. A second battery is optional.
X2:D	Battery B –	Ground	Connect to negative terminal of Battery B.
X2:1	Battery A temperature sensor	Input	Connect to a 10k NTC temperature sensor that is in intimate thermal contact with Battery A. Battery A temperature sensing is optional.
X2:2	Sensor ground	Ground	Ground reference for Battery A temperature sensor.
X2:3	Battery B temperature sensor	Input	Connect to a 10k NTC temperature sensor that is in intimate thermal contact with Battery B. Battery B temperature sensing is optional.
X2:4	Sensor ground	Ground	Ground reference for Battery B temperature sensor.

Table 5 – X2 pin descriptions

6.2.1 Choosing batteries

The following battery types are supported:

Battery type	Fully-charged terminal voltage
LiPo: 5S, 6S	21.0V, 25.2V
LiS: 8S, 9S, 10S	20.0V, 22.5V, 25.0V
LiFe: 6S, 7S	21.6V, 25.2V

Table 6 – Supported battery types

If two batteries are fitted they must have the same terminal voltage, although they may have different mA·H capacities.

The PMU does not balance battery cell voltages. If the batteries do not have internal cell balancing circuitry they should be periodically removed from the aircraft for rebalancing.

6.2.2 Additional considerations when choosing battery voltage

When operating from battery power, output voltages will always be less than the applied battery voltage, some quite significantly so. Each switching power supply has its own particular voltage headroom requirements that limit the maximum possible output voltages.

As a rough guide, if the highest output voltage is greater than 15V, then 6S LiPo (or equivalent) should be used. If the highest output voltage is less than 15V, then 5S or 6S LiPo (or equivalent) may be used. Using higher battery voltages is generally preferable as it gives greater headroom for the various switching converters and therefore longer running times when electrical power generation is not occurring.

Maintaining high output voltages from battery power alone is problematic. Even with 6S LiPos, under sustained load the battery voltage will eventually fall to the point where outputs come out of regulation due to having insufficient voltage headroom. Connecting peripheral devices directly across batteries is possible but not recommended, as the battery energy measurements will be invalid, and if the current drawn averages more than 1.2Amps the battery will never be charged.

Connecting peripheral devices that require a high voltage to the 28VDC bus is a better solution, as the 28VDC bus tracks the battery voltage very closely when electrical power generation is not occurring. The battery energy measurements will also be maintained correctly with this arrangement. Obviously this requires that the peripheral devices can tolerate 28V.

6.2.3 Battery chargers

Battery charging occurs when the battery voltage is less than the configured battery voltage minus 1V. Batteries with less than 64% of their configured voltage are considered dead and will not be charged. This corresponds to a LiPo cell voltage of 2.7V/cell.

Charging ceases when the battery voltage has risen to within 0.5V of the configured battery voltage and the charging current is less than 0.2A, and these 2 conditions have been maintained for 25 seconds. There is a 5 second guard time before charging will recommence, to prevent rapid charger cycling with high-ESR batteries.

Batteries are managed independently. Charge termination is reported in flag register R0 bits 2 and 3.

6.2.4 Low battery voltage cut-out

Low battery voltage cut-outs are implemented for the avionics, servo and payload outputs. Cut-outs only occur if battery power is the sole source of power available to the PMU. Cut-out thresholds are calculated from the configuration value for battery voltage V_B , so it is important that this value is set correctly.

The payload output shuts down when the measured battery voltage falls below 76% of the configuration value for battery voltage. This corresponds to a LiPo cell voltage of 3.2V/cell.

The avionics and servo outputs shut down when the battery voltage falls below 64% of the configuration value for battery voltage. This corresponds to a LiPo cell voltage of 2.7V/cell.

If two batteries are fitted, both batteries must fall below a given threshold in order to provoke the corresponding cut-out.

Note that low battery voltage cut-out is different to payload shedding, which – if enabled – occurs in response to loss of electrical power generation.

6.2.5 Minimum battery voltage requirement

When powering-up from battery power alone, there is a minimum voltage requirement which must be met before the PMU will turn its outputs on. This is to prevent an aircraft being inadvertently flown with discharged batteries. As for the low battery voltage cut-out, the threshold value is calculated from the configured value for battery voltage V_B .

The minimum voltage required when powering-up from batteries is 88% of the configuration value for battery voltage. This corresponds to a LiPo cell voltage of 3.7V/cell.

If two batteries are fitted, only one battery needs to meet the minimum battery voltage requirement.

Example

The battery is chosen to be a 6S LiPo. The battery voltage V_B is therefore configured to be 25.2V (4.2V/cell).

When powered-up from battery, the PMU's outputs will come on if the battery voltage exceeds 22.2V (88% of 25.2V).

When operating from battery power:

- If the battery voltage falls to 19.2V (76% of 25.2V), the PMU will shut-down the payload output.
- If the battery voltage falls to 16.2V (64% of 25.2V), the PMU will shut-down the avionics and servo outputs.

6.3 X3 – Avionics

The Avionics connector provides access to a range of different functions, these being:

- 28VDC (bi-directional bus)
- Umbilical power (input)
- Avionics power (output)
- Communications (RS232 and CAN)

The 28VDC bus provides 28VDC when electrical power generation is occurring. When electrical power generation is not occurring (i.e. the PMU is operating from battery power), the 28VDC bus is maintained at the highest available battery voltage. The 28VDC bus is bi-directional: if another source of 28VDC is present in the aircraft (such as from a second PMU in twin-engine aircraft), it may be connected directly to the 28VDC bus. This provides a level of power system redundancy.

The Umbilical power input is intended for powering the PMU externally when the aircraft is on the ground and electrical power generation is not occurring. The recommended voltage for the Umbilical input is 24 to 65VDC, although the PMU will operate more efficiently (and run cooler) if the applied voltage is above 36VDC.

Avionics power is provided on 3 pairs of pins to simplify harness wiring. It is intended to power mission-critical flight systems such as autopilot, ECU (Engine Control Unit), etc. The Avionics output voltage is user-programmable to any voltage from 12 to 21VDC. A hardware shutdown input is provided; if this pin is pulled low the Avionics output is turned off. Hardware shutdown overrides software control.

The communication interface protocols are described in separate documents.

Pin	Name	Type	Description
X3:A	28VDC bus	I/O	Industry-standard 28VDC bus.
X3:B	28VDC ground	Ground	Ground connection for 28VDC bus.
X3:C	Umbilical power	Input	Connect to an external source of DC power.
X3:D	Umbilical ground	Ground	Ground connection for umbilical power input.
X3:1	CAN H	I/O	
X3:2	Avionics shutdown	Input	Shorting to ground turns avionics power off. Leave open-circuit if functionality not required.
X3:3	RS232 Rx	Input	
X3:4	Avionics power	Output	Programmable-voltage uninterruptible power output. Intended for low-power mission-critical aircraft systems, such as autopilot, ECU, etc.
X3:5	Avionics power	Output	Duplicate of X3:4.
X3:6	Avionics power	Output	Duplicate of X3:4.
X3:7	CAN L	I/O	
X3:8	Comms ground	Ground	Ground reference for CAN and RS232.
X3:9	RS232 Tx	Output	
X3:10	Avionics ground	Ground	Ground connection for avionics power output
X3:11	Avionics ground	Ground	Duplicate of X3:10.
X3:12	Avionics ground	Ground	Duplicate of X3:10.

Table 7 – X3 pin descriptions

6.4 X4 – Servo / Payload

The Servo output voltage is user-programmable to any voltage from 5 to 12VDC, and the Payload output voltage is user-programmable to any voltage from 12 to 21VDC. Individual dedicated hardware shutdown inputs are provided; if either of these pins are pulled low the associated output is turned off. Hardware shutdown overrides software control.

Pin	Name	Type	Description
X4:A	Servo power	Output	Programmable-voltage uninterruptible power output. Intended for driving servos via a servo bus. Can be turned off via remote command or hardware signal.
X4:B	Servo ground	Ground	Ground connection for servo power output.
X4:C	Payload power	Output	Programmable-voltage uninterruptible power output. Intended for driving payload devices via a payload bus. Can be turned off via remote command or hardware signal.
X4:D	Payload ground	Ground	Ground connection for payload power output.
X4:1	Servo shutdown	Input	Shorting to ground turns servo power off. Leave open-circuit if functionality not required.
X4:2	Payload shutdown	Input	Shorting to ground turns payload power off. Leave open-circuit if functionality not required.
X4:3	Shutdown ground	Ground	Ground reference for servo shutdown input.
X4:4	Shutdown ground	Ground	Ground reference for payload shutdown input.

Table 8 – X4 pin descriptions

7 Front Panel Arrangement

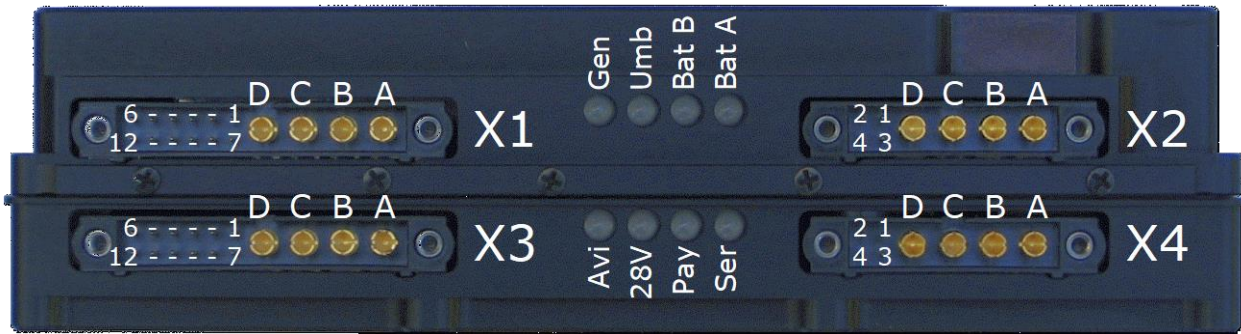


Figure 6 – Locations of connectors and visual indicators on the front panel

7.1 Connector pin locations

X1	BLDC MOTOR	X2	BATTERIES	X3	AVIONICS	X4	SERVO / PAYLOAD
A	BLDC phase A	A	Battery A +	A	28VDC power	A	Servo power
B	BLDC phase B	B	Battery A -	B	28VDC ground	B	Servo ground
C	BLDC phase C	C	Battery B +	C	Umbilical power	C	Payload power
D	Airframe ground	D	Battery B -	D	Umbilical ground	D	Payload ground
1	Hall 1	1	Bat A temp sensor	1	CAN H	1	Servo shutdown
2	Hall 2	2	Sensor ground	2	Avionics shutdown	2	Payload shutdown
3	Hall 3	3	Bat B temp sensor	3	RS232 Rx	3	Shutdown ground
4	Master shutdown	4	Sensor ground	4	Avionics power	4	Shutdown ground
5	Hall power			5	Avionics power		
6	Hall ground			6	Avionics power		
7	Arm			7	CAN L		
8	Arm ground			8	Comms ground		
9	BLDC temp sensor			9	RS232 Tx		
10	Sensor ground			10	Avionics ground		
11	Start			11	Avionics ground		
12	Start ground			12	Avionics ground		

7.2 Visual indicator locations

NAME	FUNCTION	GREEN	RED	DARK
Gen	Generator status indicator	Generating	Starting	Neither
Umb	Umbilical power indicator	Present	-	Absent
Bat B	Battery B indicator	Charging	Discharging	Battery absent
Bat A	Battery A indicator	Charging	Discharging	Battery absent
Avi	Avionics power indicator	On	Overcurrent	Off
28V	28VDC power indicator	On	Overcurrent	Off
Pay	Payload power indicator	On	Overcurrent	Off
Ser	Servo power indicator	On	Overcurrent	Off

8 Specifications

8.1 Absolute Maximum Ratings *Note 1*

Symbol	Parameter	Min	Max	Unit
V _{BLDC}	BLDC motor voltage, peak-to-peak <i>Note 2</i>	-140	+140	V _{PP}
V _{UMB}	Umbilical input voltage	-70	+70	V _{DC}
V _{BAT}	Battery voltage <i>Note 2</i>	-30	+33.3	V _{DC}
V _{28VDC}	28VDC bus voltage <i>Note 3</i>	-1	+33.3	V _{DC}
V _{AVI}	Avionics output voltage <i>Note 3</i>	-1	+26.7	V _{DC}
V _{PAY}	Payload output voltage <i>Note 3</i>	-1	+26.7	V _{DC}
V _{SERVO}	Servo output voltage <i>Note 3</i>	-1	+13.3	V _{DC}
V _{RS232_I}	RS232 input voltage	-25	+25	V _{DC}
V _{RS232_O}	RS232 output voltage	-13.2	+13.2	V _{DC}
V _{CAN_L} , V _{CAN_H}	CAN L and H voltage	-42	+42	V _{DC}
V _{DIG}	Digital inputs (Start, Hall sensors)	-10	+15	V _{DC}
T _{AMB}	Ambient temperature (unpowered)	-55	+125	°C

Table 9 – Absolute Maximum Ratings

Note 1: Absolute maximum ratings are those values beyond which damage to the product may occur. Functional operation under these conditions is not implied (or recommended).

Note 2: Pin protected from overvoltage by a Transient Voltage Suppressor (TVS) diode. Excursions above absolute maximum rating will be clamped, resulting in large current flows.

Note 3: Pin protected from reverse and overvoltage by a TVS diode. Excursions below absolute minimum or above absolute maximum ratings will be clamped, resulting in large current flows.

8.2 Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{BLDC}	BLDC motor voltage, peak-to-peak	18.5	130	V _{PP}
V _{UMB}	Umbilical input voltage	24	65	V _{DC}
V _{BAT}	Battery voltage (fully charged, no load)	20.0	25.2	V _{DC}
V _{28VDC}	28VDC bus voltage	26.6	29.4	V _{DC}
T _{INT}	Internal temperature	-40	+85	°C

Table 10 – Recommended Operating Conditions

8.3 Electrical Specifications (-40 to +85°C, typical values given for +25°C)

8.3.1 Power outputs

	Min	Typ	Max	Unit
Battery chargers				
Output voltage range	20.0		25.2	V _{DC}
Output voltage accuracy		±0.1	±0.2	V _{DC}
Charging current (per battery)	0		1.2	A _{DC}
Continuous output power (per battery)			30	W
Avionics and Payload outputs				
Output voltage range	12.0		21.0	V _{DC}
Output voltage accuracy		±0.1	±0.2	V _{DC}
Continuous output current capability ^{Note 1}	7.5			A _{DC}
Peak output current capability ^{Note 2}	9			A _{DC}
Continuous output power			120	W
Servo output				
Output voltage range	5.0		12.0	V _{DC}
Output voltage accuracy		±0.1	±0.2	V _{DC}
Continuous output current capability	10			A _{DC}
Peak output current capability ^{Note 2}	12			A _{DC}
Continuous output power			120	W
28VDC bus				
Output voltage	27.3	28.0	28.7	V _{DC}
Continuous output power ^{Note 3}		300	450	W
Peak output power ^{Note 3}			500	W
Hall sensor power output				
Output voltage	4.8	5	5.2	V _{DC}
Continuous output current capability	50			mA _{DC}

Table 11 – Power outputs

Note 1: Derate current linearly above 16VDC to observe continuous output power specification.

Note 2: Maximum of 10 seconds per minute.

Note 3: Maximum output power depends upon input voltage and ambient temperature – see Graph 2.

Current capability specifications give the minimum current that an output is guaranteed to be able to deliver.

8.3.2 Battery inputs

	Min	Typ	Max	Unit
Quiescent battery current (V_B = 25.2V)				
All outputs on (V _P =12V, V _A =12V, V _S =6V)		160	240	mA
All outputs off		100	150	mA
Shutdown (master shutdown input = low)		0.5	1.0	mA

Table 12 – Battery inputs

8.3.3 Communications interfaces

	Min	Typ	Max	Unit
CAN (2.0B, unterminated)				
Baud rate (user-configurable)	125		1000	kb/S
RS232 (8N1)				
Baud rate (fixed)		57.6		kb/S

Table 13 – Communications interfaces

8.3.4 Digital and analog inputs

	Min	Typ	Max	Unit
Shutdown inputs (Avionics, Servo, Payload, Master)				
Resistance to ground to enable			1.0	kΩ
Resistance to ground to disable	200			kΩ
Arm input <i>Note 1</i>				
Required current capability of input switch		1.5	3	mA
Input current to disarm			15	μA
Digital inputs (Start, Hall sensors)				
High-level input voltage	3.0			V
Low-level input voltage			1.0	V
Input pull-up resistance (to +5.0V)		10		kΩ

Table 14 – Digital and analog inputs

8.3.5 Monitoring


	Min	Typ	Max	Unit
Voltage monitoring				
Accuracy (battery chargers, avionics, servo, payload)		±0.1	±0.2	V _{DC}
Accuracy (28VDC bus)		±0.2	±0.4	V _{DC}
Accuracy (internal HV bus)		±1	±2	V _{DC}
Current monitoring				
Accuracy (battery chargers, avionics)		±0.1	±0.2	A _{DC}
Accuracy (28VDC bus)		±0.2	±0.4	A _{DC}
Accuracy (servo, payload)		±0.4	±0.8	A _{DC}
Temperature monitoring				
Accuracy (PMU)		±1		°C
Accuracy (batteries, BLDC motor) <i>Note 1</i>		±1		°C
Speed monitoring				
Accuracy (BLDC motor)		±150		RPM

Table 15 – Monitoring

Note 1: Using external 10k NTC temperature sensor.


8.4 Typical Characteristics

8.4.1 28V Buck-Boost converter efficiency

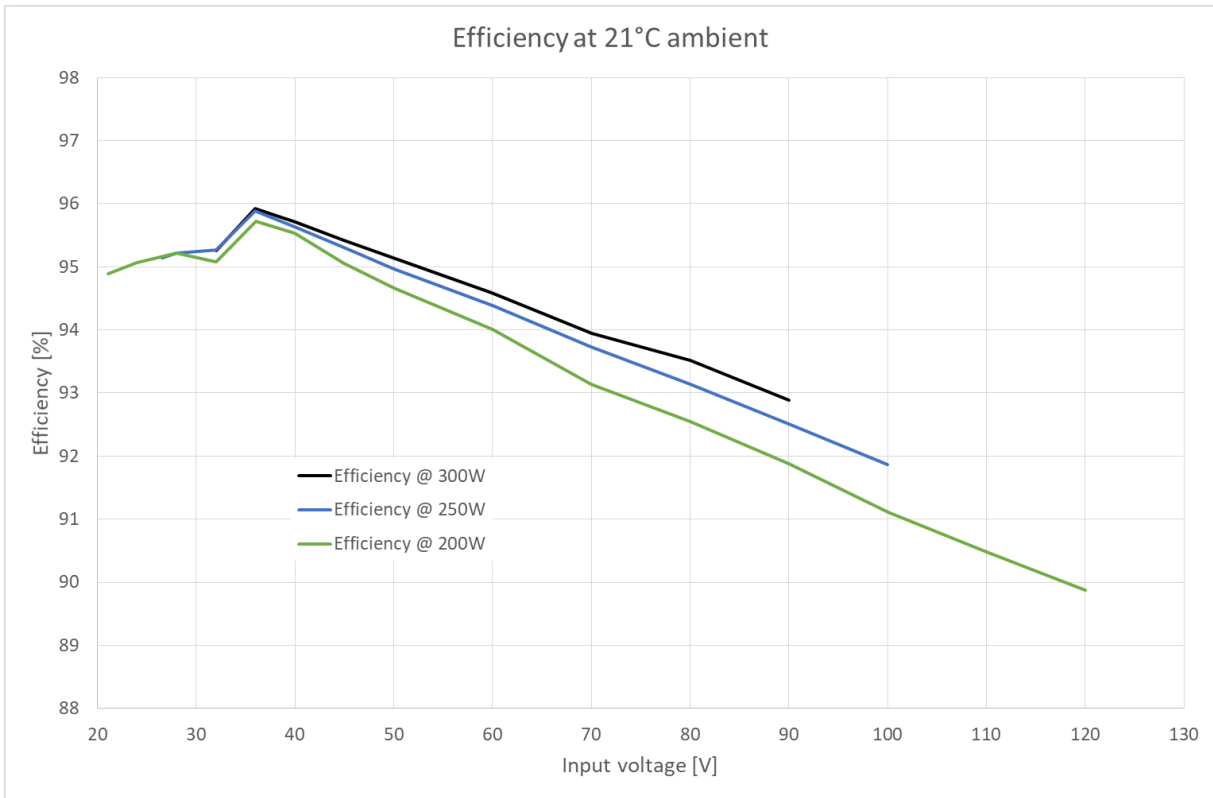


Graph 1 – 28V Buck-Boost converter efficiency

8.4.2 28V Buck-Boost converter maximum output power

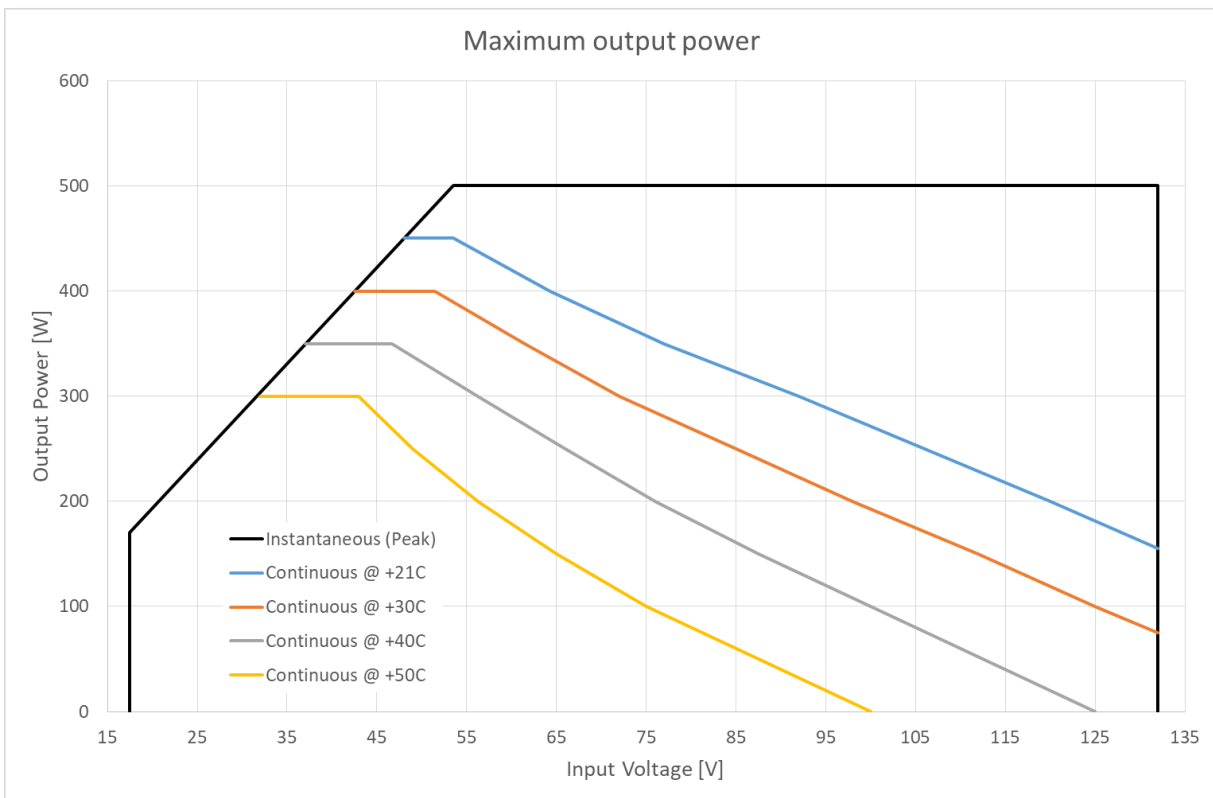


Graph 2 – 28V Buck-Boost converter maximum output power

8.4.3 28V Buck-Boost converter temperature rise

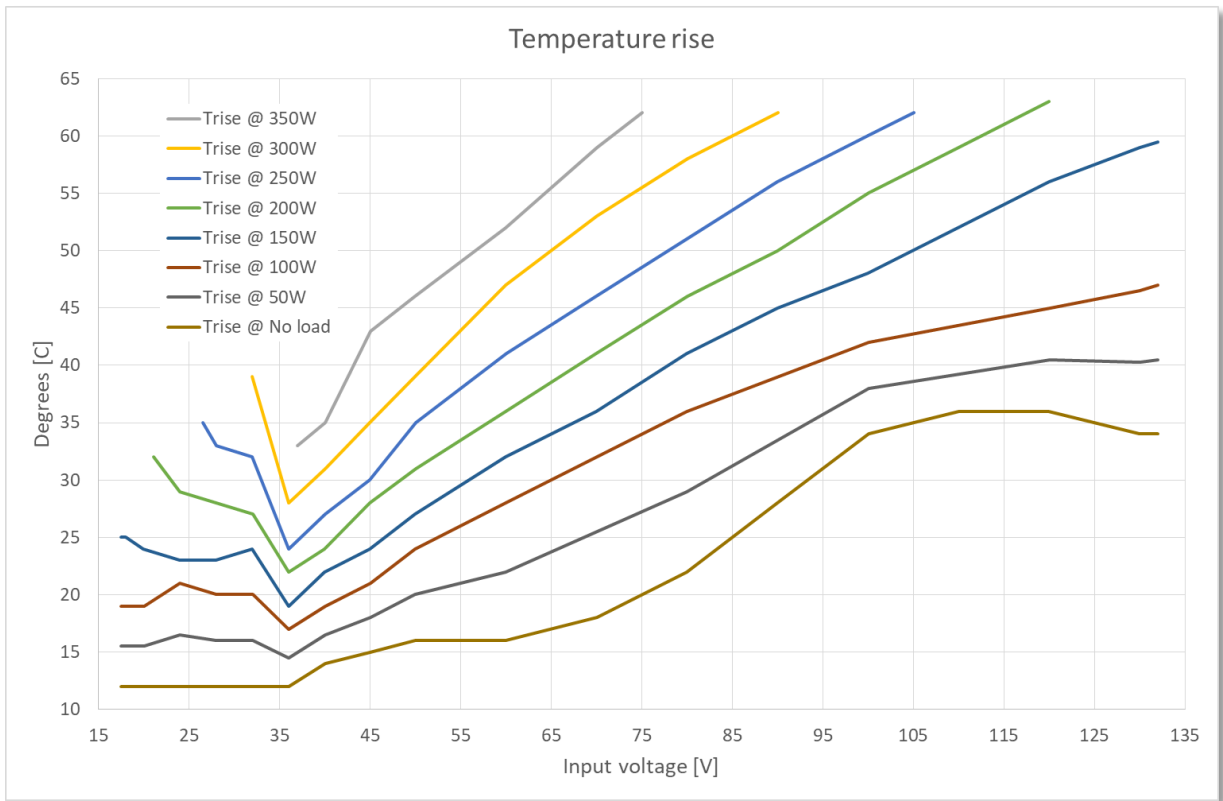


Graph 3 – 28V Buck-Boost converter temperature rise

8.4.4 28V Buck-Boost converter quiescent behaviour

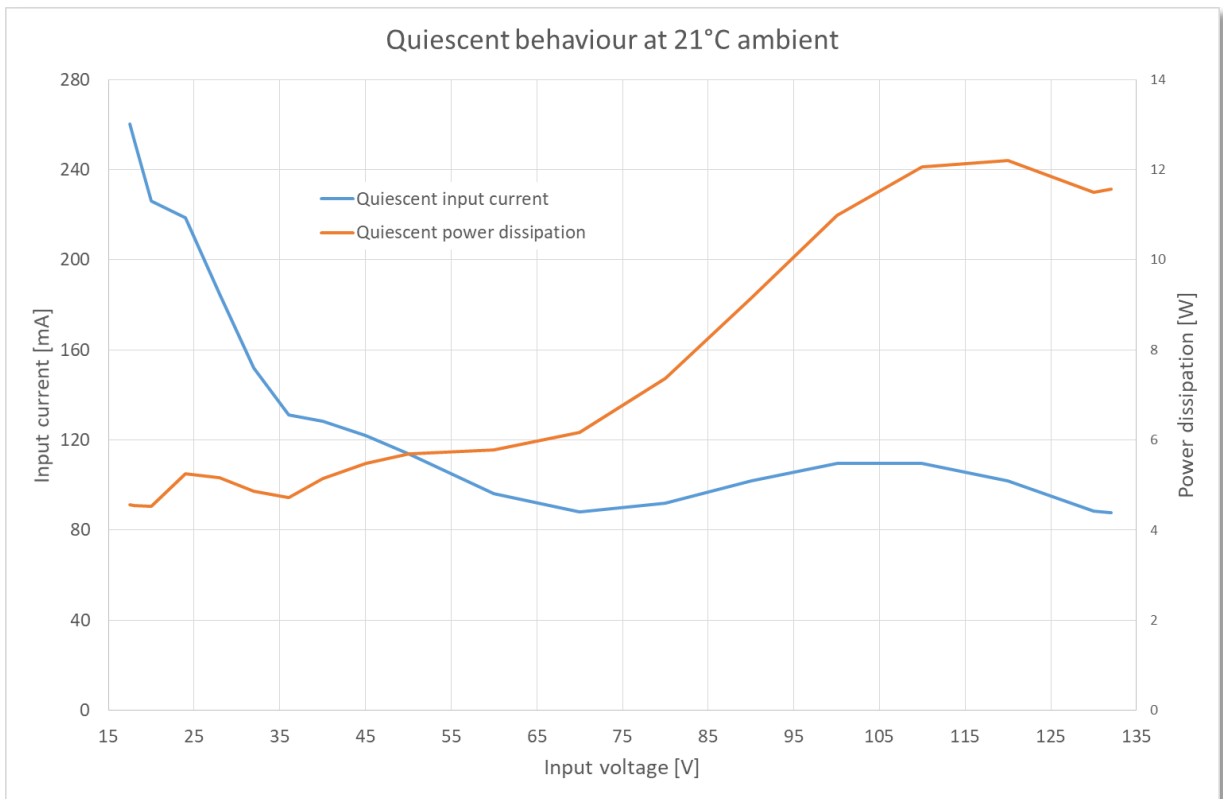

Graph 4 – 28V Buck-Boost converter quiescent behaviour

8.5 Mechanical Characteristics

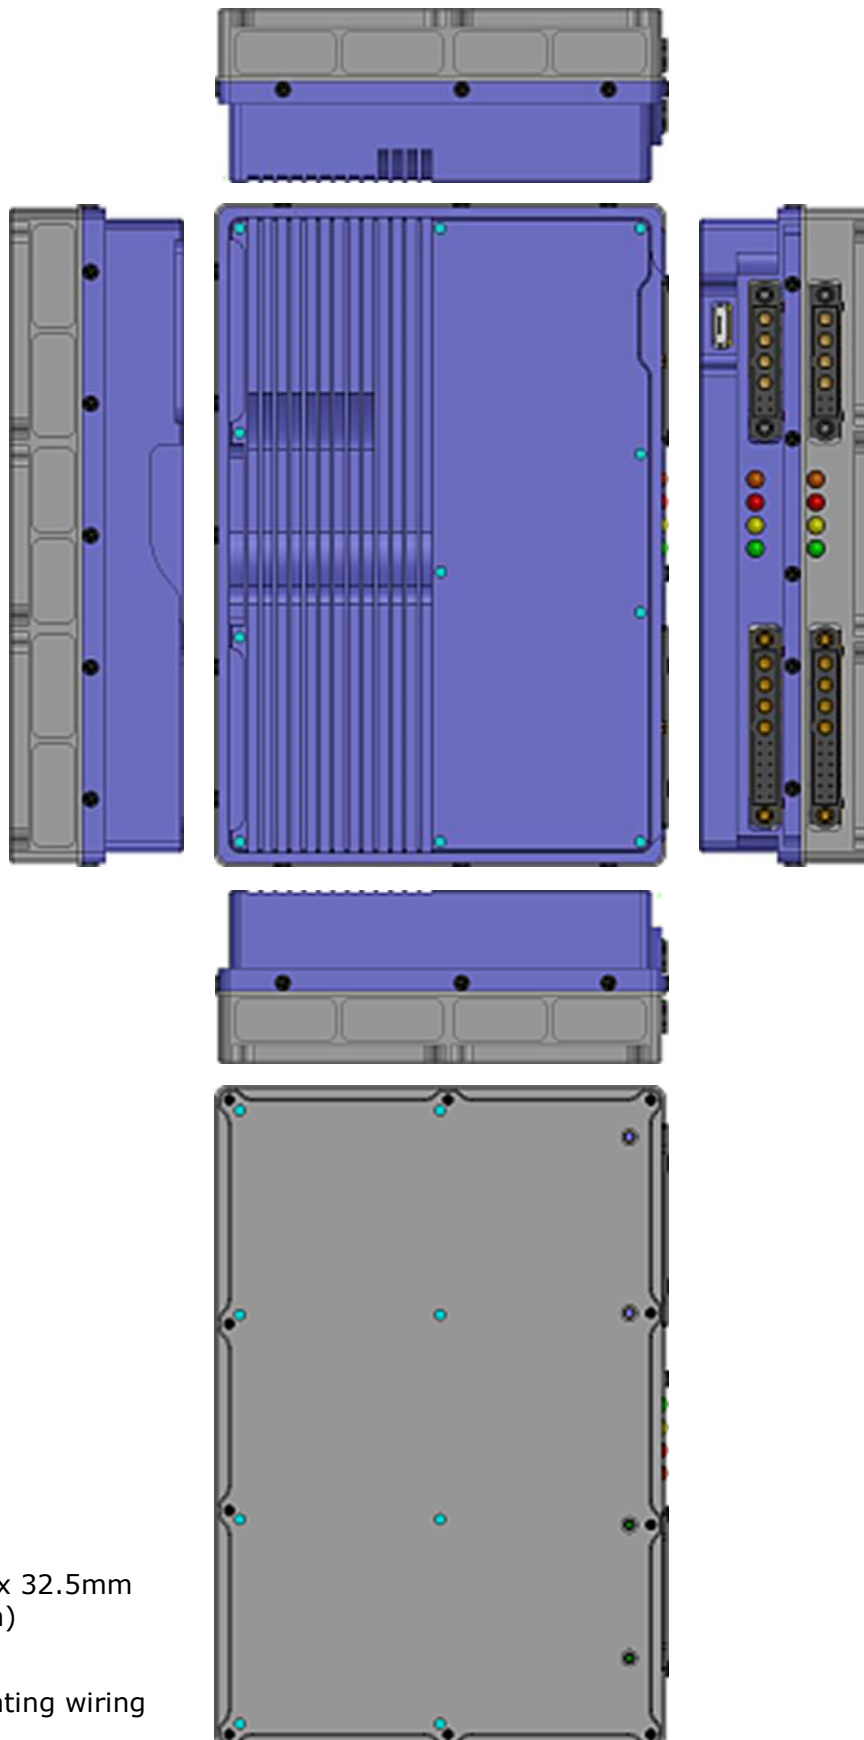

Dimensions:
124.4 x 85.0 x 32.5mm
(excluding fan)

Mass: 315g
(excluding mating wiring
harnesses)

Download the Step files from https://millswoodeng.com.au/cad/250w_pmu_enclosure.zip

8.5.1 Mounting

The underside of the enclosure has 10 x M2 tapped holes for mounting the PMU to a flat surface. A template for drilling holes into the mounting surface is given in Figure 7 below:

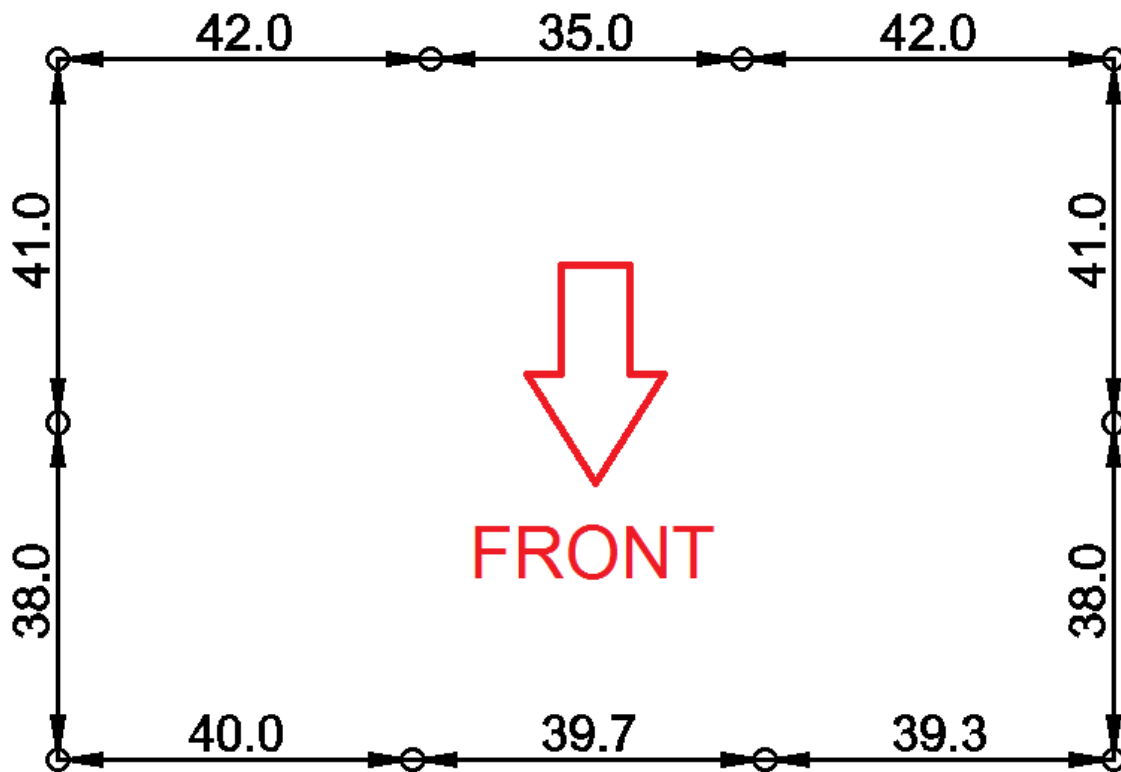


Figure 7 – Mounting hole locations

Be careful not to distort the enclosure by mounting to a warped surface. Mounting screws should project no more than 4.0mm into the enclosure.

9 Document version history

9.1 1.5 -> 2.0

- RPM range changed from 4:1 to 7:1. Multiple places.
- Battery voltage lower limit changed from 16.8V to 20.0V. Multiple places.
- BLDC motor upper voltage limit changed from 72V to 130V. Multiple places.
- Umbilical input upper voltage limit changed from 48V to 65V. Multiple places.
- Safe Operating Area management section deleted.
- Discussion of Master shutdown input added. Multiple places.
- Maximum Payload and Servo voltages graph deleted.
- Electrical specifications updated.
- Typical characteristics updated.
- Discussion of battery charge termination algorithm added.
- Appendices deleted.
- Temperature sensor type changed from KTY83 to 10k NTC. Multiple places.